BNSF RAILWAY | 4600 CU. FT. COVERED HOPPER | ATSF 314800-315199

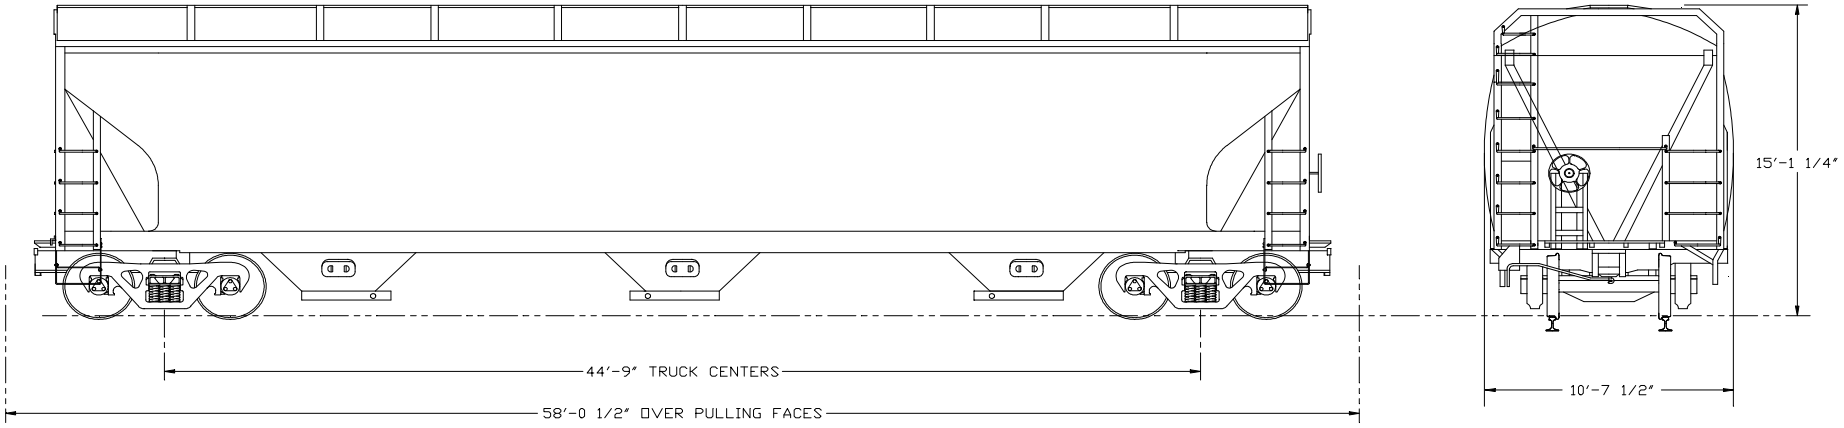

GENERAL CAR INFO

Built date	1975
Car builder	ACF
AFE number	
AAR Mech. Des.	LO
AAR Car Code	
GST Code	
Type unloading	Gravity
Clearance plate	B
C.G. - Empty	NA
C.G. - Full to Eaves	90"
Min. curve-Coupled	NA
Min. curve-Uncoupled	NA
Braking ratio - Empty	NA
Braking ratio - Loaded	NA
Braking ratio - H.B.	NA

DIMENSIONS/CAPACITIES

Length (strikers)	55'-5"
Coupled length	58'-0 1/2"
Truck ctrs.	44'-9"
Inside length	53'-3 3/16"
Inside width	10'-5 1/16"
Width (over eaves)	8'-0 7/8"
Extreme width	10'-7 1/2"
Extreme height	15'-1 1/4"
Volume	4,600 cu. ft.
Gross rail load	263,000 lbs.
Lightweight	63,800 lbs.
Load limit	199,200 lbs.
Pinion ctr hgt (Loaded)	NA
Pinion offset	NA
Outlet gate size	13" x 46", 3/car
Trough opening	NA
Min. gate clearance	NA

SPECIALTY SUPPLIERS AND PART NUMBERS

Truck type (various)	NA	Brake system	Body mounted
Bolster pattern/AAR code	CS-3184-HT	Control valve	ABD
S.F. patt./AAR code (914-188)	F9C-03BN-UA	Brake cylinder	10" x 12"
S.F. patt./AAR code (various)	F9C-03DN-UA	Slack adjuster	Univ. U-1900-H
Truck spring group	D-5	Brake shoes	2" Comp.
Snubbing type	S-2-C	Handbrake	Equipco 4000A
Snubber spring group	NA	Hatch cover	NA
Supp. Snubber	HS-6	Outlet gate	Keystone
Column wear plate	NA	Running Boards	A.O. Smith
Pedestal roof liners	NA	Brake Beams	18" unit
Wheels	CH-36, Class U		
Roller bearing	R.B.		
Adapter	NA		
Truck side bearing	NA		
Horz. center plate liner	15 3/4"		
Vertical wear ring	NA		
Coupler/Knuckle	E60C-HT		
Follower	Fabricated		
Yoke	Y40A-HT		
Draft sill/Striker assy.	Fabricated		
Cp. carr. wear plt.	NA		
Uncoupling rod	NA		
Draft Gear/Cushion	Nat. NC-440		

FORMER ROAD NUMBERS

NOTES AND EXCEPTIONS: